


S-FLT-2D-5G, S-FLT-2D-24G

Dimension

Width × Height × Length 12.4 mm × 90 mm × 78 mm

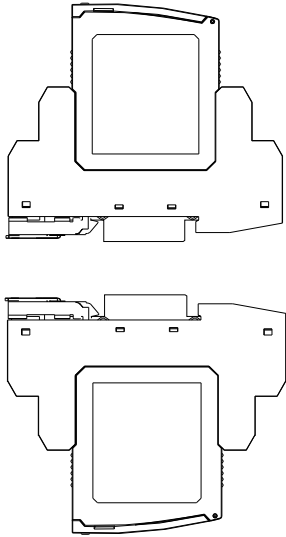

Installation

The apparatus can be mounted on a 35 mm standard rail corresponding to DIN EN 60715, they must be snapped onto the rail, and never slanted or tipped to the side.

Requirements for installation

In the safe zone, surge protective devices and safety barrier can be installed in the same or different cabinet,