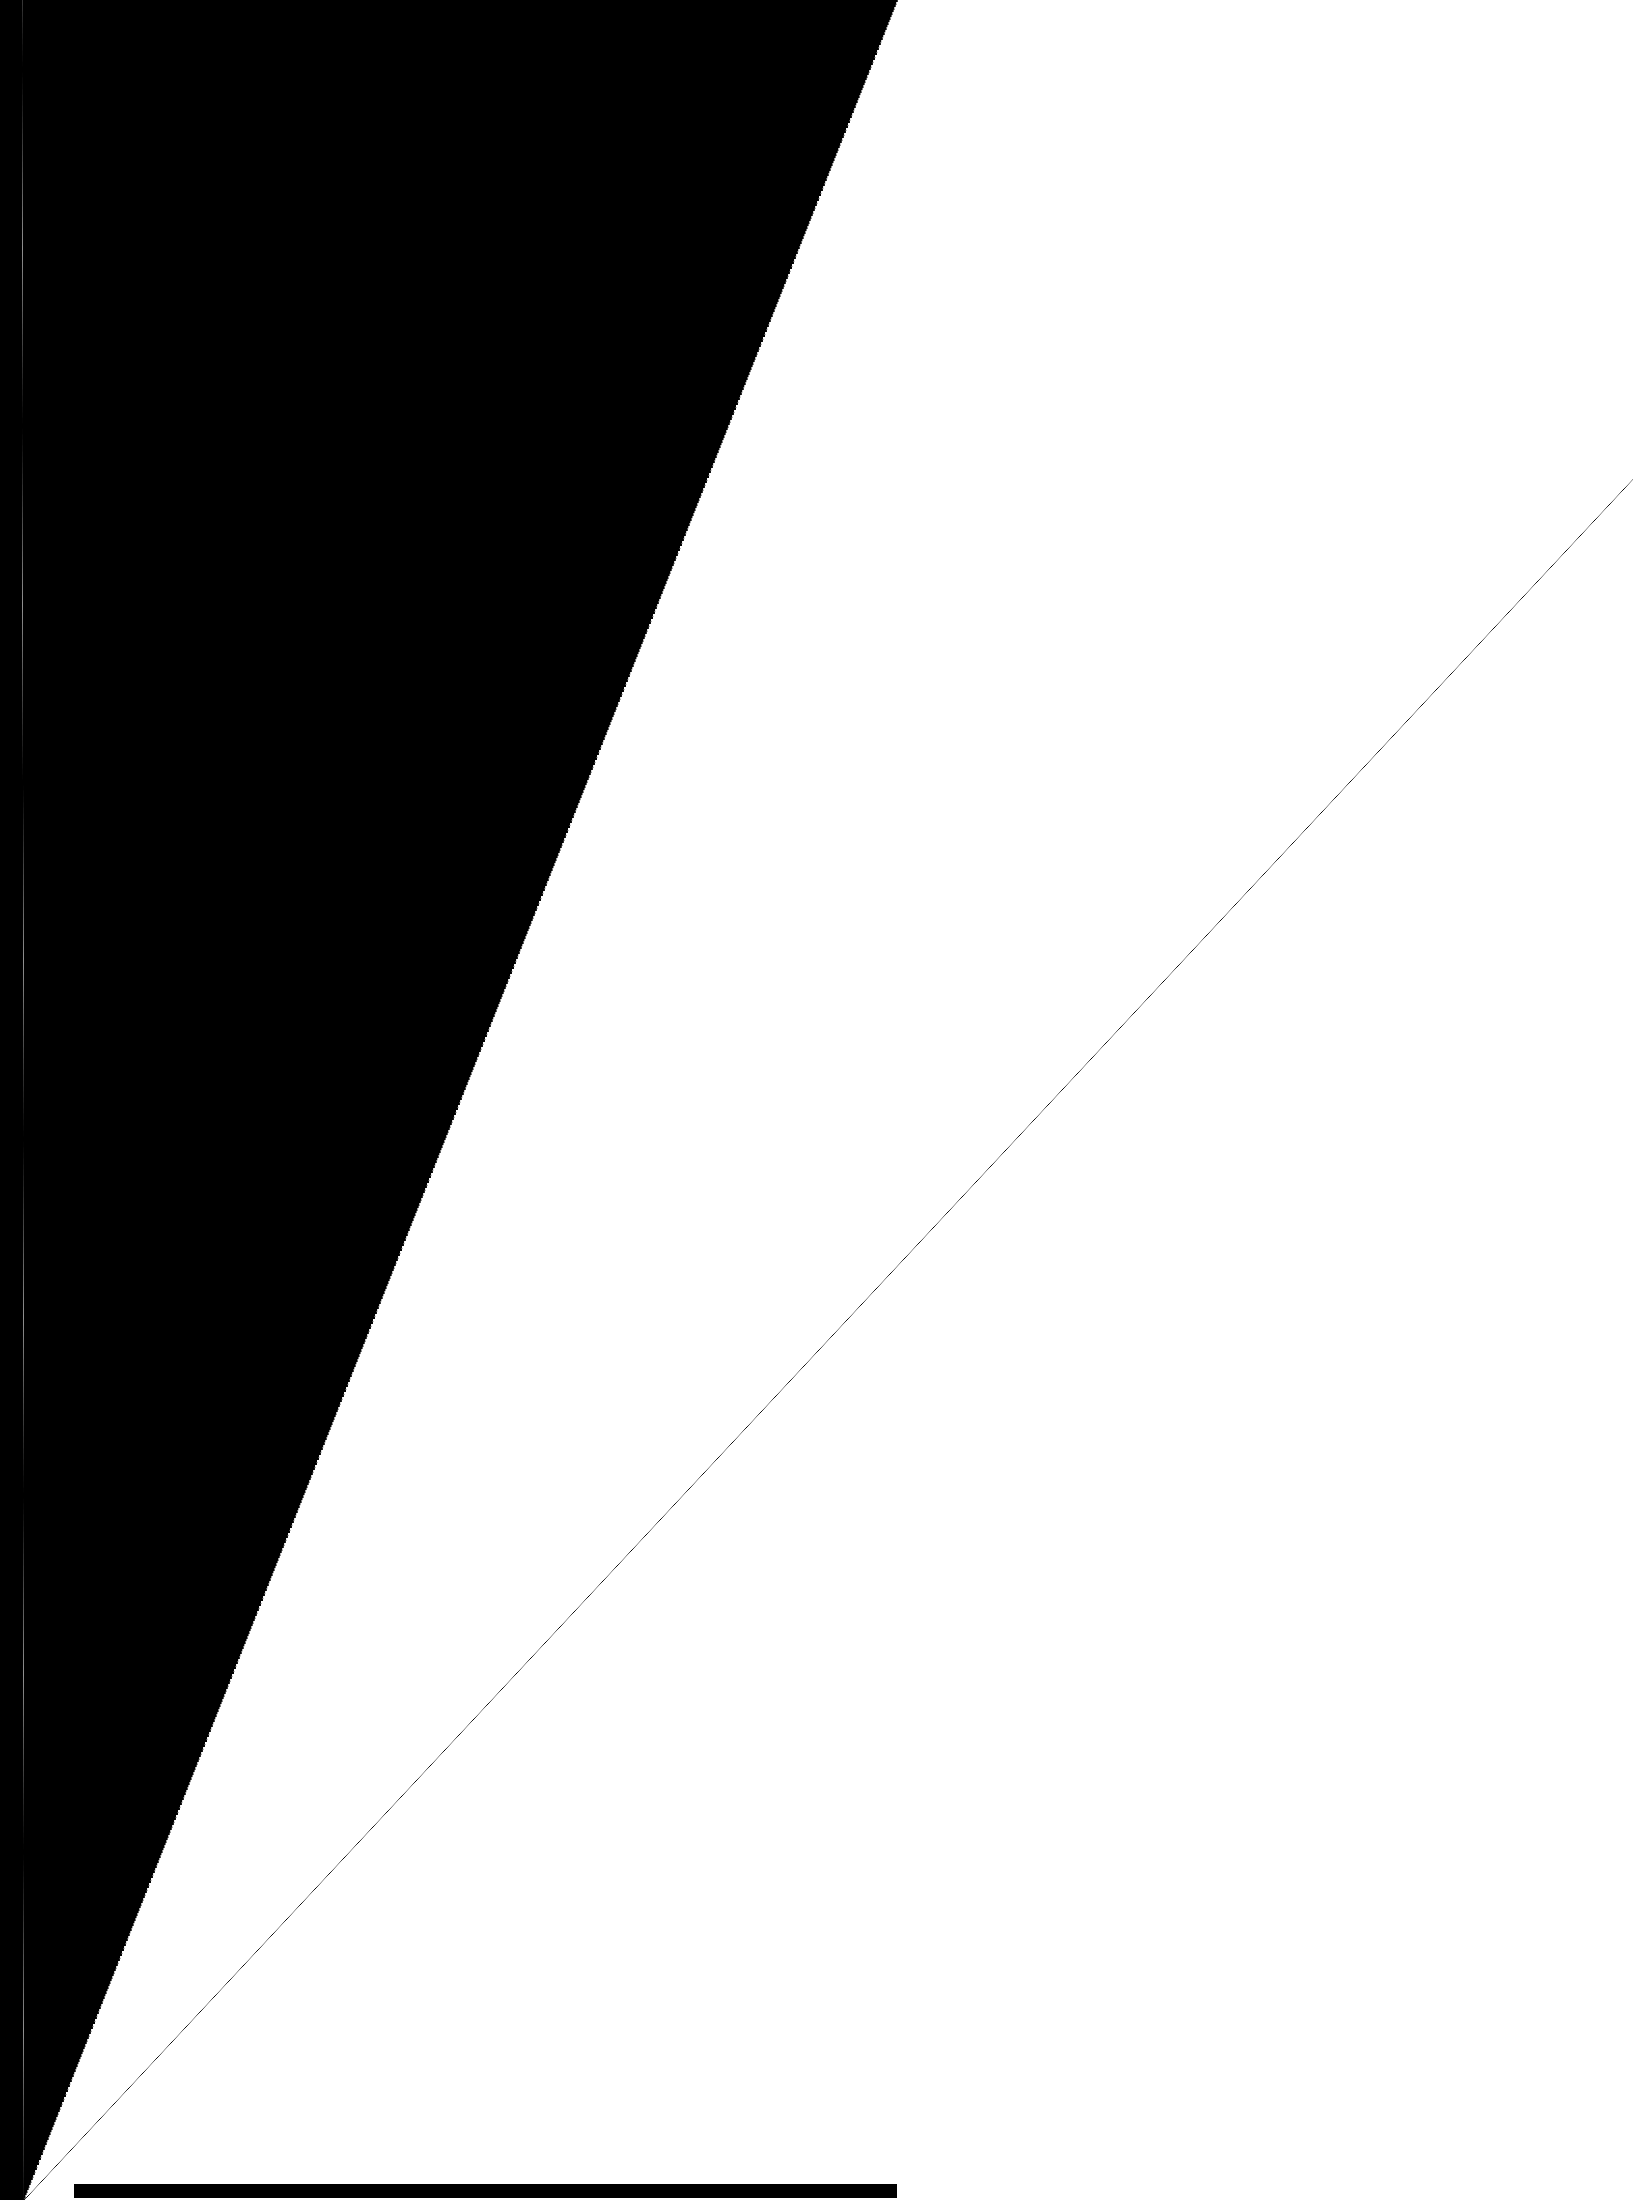Power supply:	18 V DC~32 V DC (Reverse power protection)
Power dissipation:	~sistance: pe.cn5V 7 14.79 0 7 14.79 ~sistance: pe.cn10V 7 1-5.60 0/4 y: E.79 ~sistance: pe.cn~sistance: pe.cn~sistan
Input signal:	
Line resistance:	
Output signal:	
Load resistance:	
Compensation accuracy:	
Temperature drift:	
Response time:	
Electromagnetic compatibility:	
Dielectric strength:	
Insulation resistance:	
Operation temperature:	
Storage temperature:	
Dimension:	
Output states: